


# MIX 750 MORTARMAN

TOWABLE VERTICAL SHAFT PADDLE MIXER

## PRODUCE 18 CUBIC FEET OF MUD EVERY THREE TO FOUR MINUTES WITH THE MIX 750

The Mix 750 is the perfect partner for busy precast mixing operations, and on bridge and highway jobs. The discharge system is easy to open and close and protected from being hit by a mud bucket or forklift. The safety grate is hinged, making access immediate. The Mix 750 is Mini-Batch Plant production for a fraction of the cost. These mixers develop vast amounts of mixing power, far more than any horizontal shaft mortar mixer. The ability to mix refractory mud or stiff, dry materials is unparalleled in the industry.

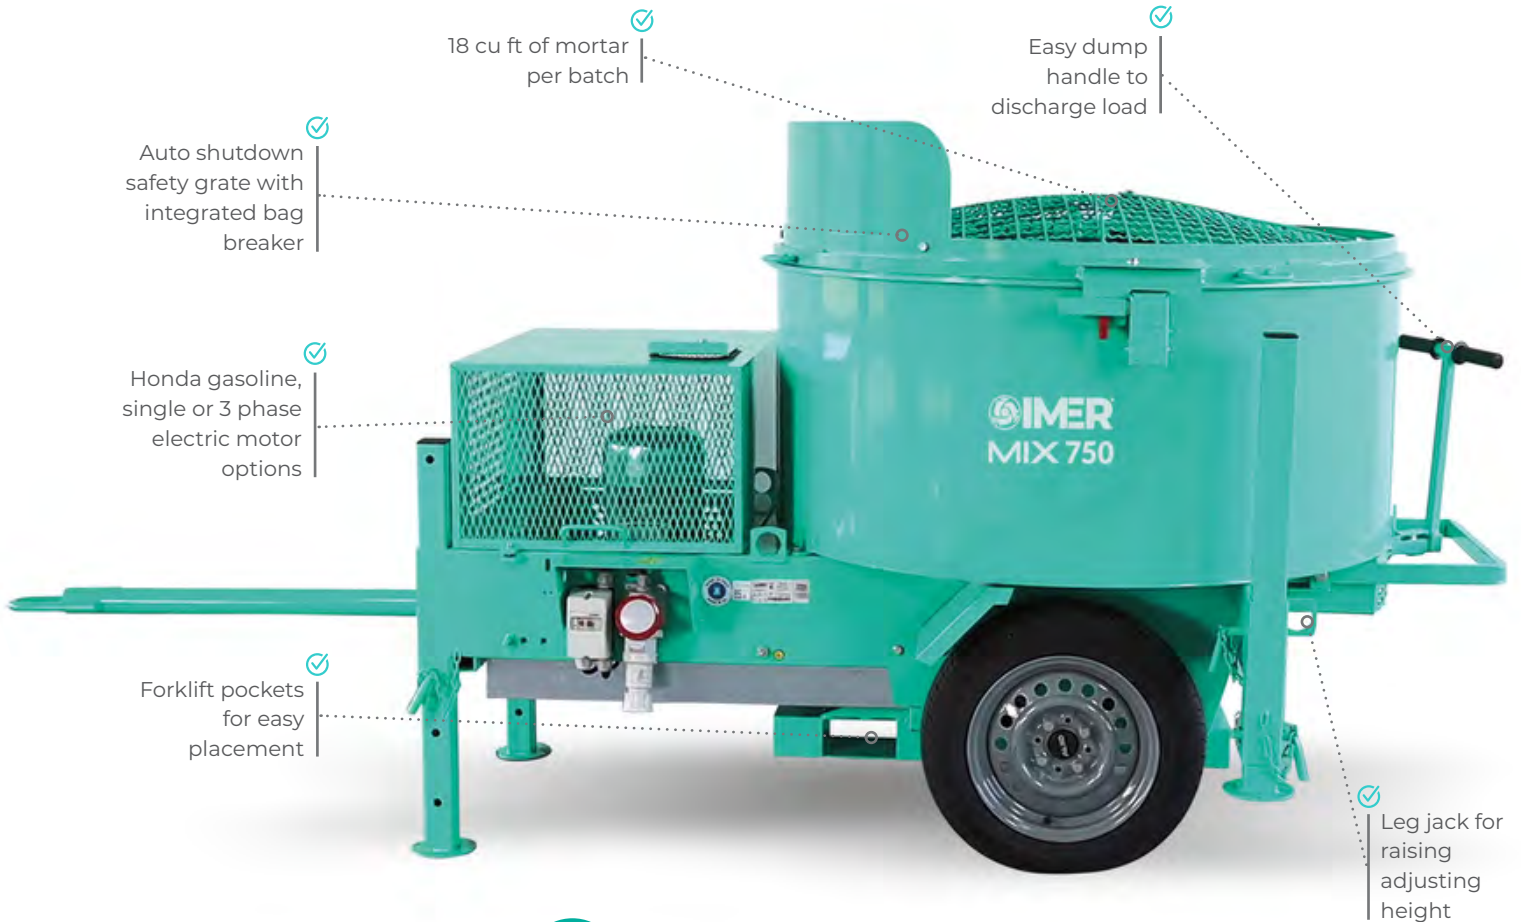

POWERED by  
**HONDA**



## Technical specifications

|                                    | MIX 750       |
|------------------------------------|---------------|
| Model # (240V, 5 HP, Single-Phase) | 1194644       |
| Model # (208V, 7.5 HP, 3 Phase)    | 1194645       |
| Model # (480V, 7.5 HP, 3 Phase)    | 1194646       |
| Model # (Gas, 13 HP Honda GX)      | 1194648       |
| Model # (No motor)                 | 1194640       |
| Drum capacity                      | 22 cu ft      |
| Batch output                       | 18 cu ft      |
| Drum diameter                      | 52 in         |
| Maximum aggregate size             | 3/8 in        |
| Discharge outlet height: max/min   | 29 in / 23 in |
| Pneumatic wheels                   | 22 in         |
| Weight                             | 1,588 lbs     |
| Width (palletized)                 | 63 in (64 in) |
| Length (palletized)                | 90 in (86 in) |
| Height (palletized)                | 62 in (64 in) |



### SET UP

The stability legs slide outward to accommodate a wide variety of mud pans. They can also be adjusted up or down depending upon the desired discharge height.

These extra wide stability legs are standard on the Mix 750.



### INDUSTRIAL ELECTRIC MOTOR

The motors used in the MIX 750 are industrial-duty electric motors available in a wide range of voltage, single-phase or three-phase. The motors can operate continuously and easily mix stiff, dry materials.

(\*) Materials can influence the batch output (\*\*). Warning: Cancer and Reproductive Harm - <https://www.p65warnings.ca.gov>  
(\*\*\*) Operating Dimensions (palletized)